

# Embossed Custom

Insulated Commercial  
Steel Doors

# Embossed Custom

Customer designed  
specialty embossments



Power Ready



STC 35\*



**Fire-Rated\***

- Up to 3hr.
- Singles / Pairs



**Hurricane\***

- Up to +/- 75psf
- Singles / Pairs



**Thermal Value**

- R Value = 7.04 - 11.11
- U Value = 0.14 - 0.09

- △ Ability to create unique layouts or patterns
- △ Match specific brand guidelines
- △ Ideal for interior and exterior applications

Full Size Closer  
Reinforcing


Fully Bonded Rigid  
Polystyrene

Beveled Edges

7-Gauge Hinge  
Reinforcing

18-Gauge A60  
Galvanneal

Water-Based  
Primer Finish

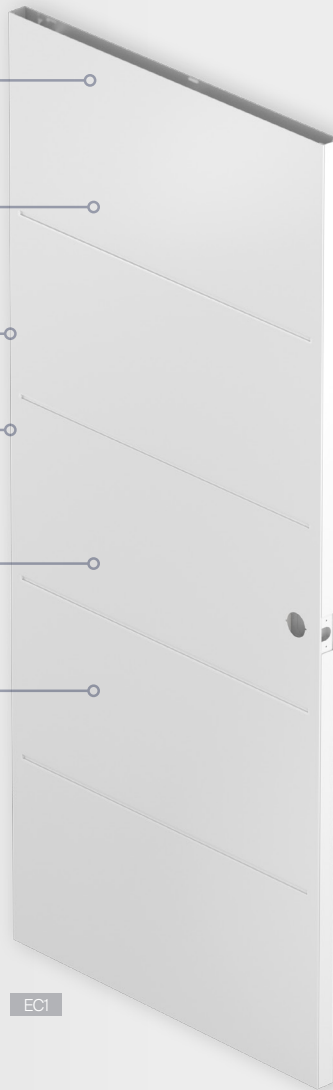


EC1

## Additional Options:


- Custom sizes and hardware configurations\*\*
- Flush top (steel top cap)
- Paintable galvanneal (unprimed) finish
- Specialty finishes
- Polyurethane and TRR cores available




Complies with  
**ANSI A250.8**




EC2



EC3




EC4



EC5



EC6



EC7

## Applicable Standards:

- ANSI/BHMA A156.115
- ANSI A250.4
- ANSI A250.8
- ASTM A653
- ANSI A250.10
- UL 10B
- UL 10C
- ASTM E2010
- ASTM E2074
- CAN4 S104
- ASTM E90
- ASTM E413

\*See specific listings for full details

\*\*See product catalog for available sizes



**DAYBAR**

daybar.com  
(888) 332-9227

architects@daybar.com  
sales@daybar.com

**DAYBAR**  
**XPRESS**